

Power

Horsepower carrier vehicle dependent
 Engine rpm Setting 2,100 rpm

Dimensions

Weight (app)900 lb
 Weight w/ MT-523,360 lb
 Overall Length26"
 Overall Width44"
 Overall Height83"
 Mast Extended130"
 Probe Stroke56"

Hydraulics

Hydraulic Oil Pressure2,000 psi
 Oil Flow13 gpm
 Hydraulic Oil Cooler carrier vehicle dependent
 Hydraulic Oil Capacity carrier vehicle dependent

Hydraulic Operation

Down Force19,000 lb
 Pull-Up Force25,200 lb
 Head Travel Rate Up21 sec
 Head Travel Rate Down16 sec
 Side-to-Side Movement10.5"

Hydraulic Hammers

Standard Hammer - SK-5850 ft-lb - 1,200 bpm
 Optional Hammer - BR-8790 ft-lb - 1,100 bpm
 Optional Hammer - AR-48175 ft-lb - 1,500 bpm

Auger Drive Head

Optional 1,000 ft-lb
 (Upgrade to AR-48 Hammer - No 1,000 Auger Available)

call for pricing

PowerProbe™ 9100-SK



If you're looking for the most portable and maneuverable track system, without sacrificing power or performance, there isn't another small direct push model like the 9100-SK.

The rugged rubber tracks keep the unit moving when soil conditions get soft, wet or muddy with minimal disturbance to the work site.

The probe can easily be removed to allow the use of the carrier vehicle's accessories such as the bucket, pallet forks, and backfill blade.


Standard Features

- Rubber tracks for minimal ground disturbance
- Long lasting powder-coated finish
- Anodized metal power track
- Quick disconnect probe unit
- Spring-loaded pull yoke
- Enhanced control panel
- 36" clearance width
- One year warranty
- Side to side probe movement
- 50 ft-lb hydraulic hammer

Convenience/Safety Package

- Hand auger to pre-clear soil boring locations
- Hydraulic oil pressure gauge

PowerProbe™ 9100-SK

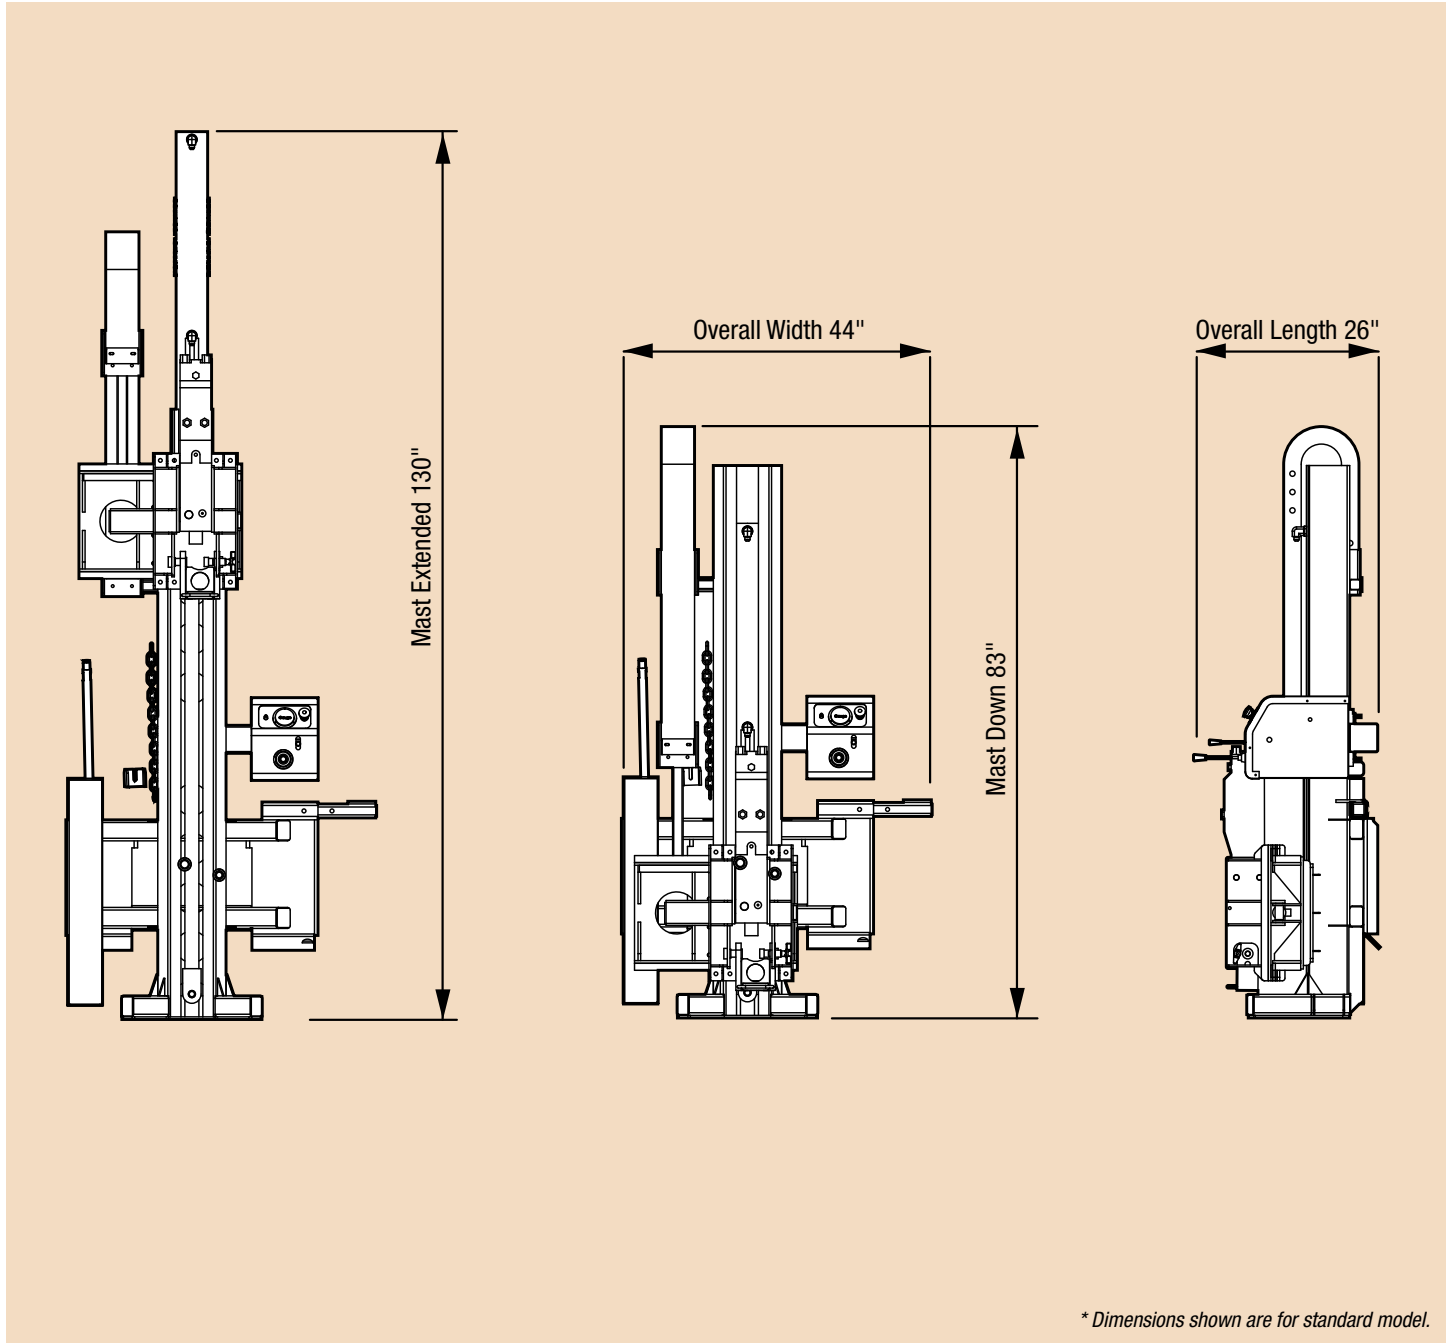

Options and Accessories

- Regen System

Mounting Options

- MT-52 Bobcat or Equivalent